


DIGI® Bench Scale and Indicator Package

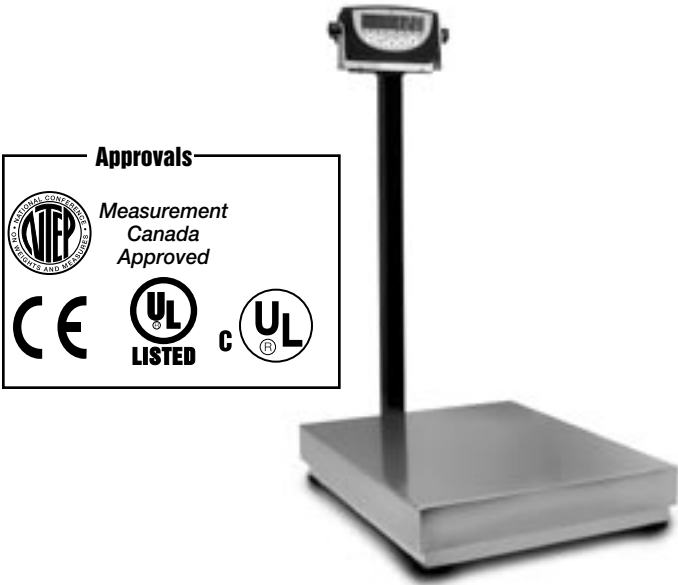

Standard Features

- Large 0.8" (20.3 mm) 6-digit red light emitting diode (LED) display
- 115 or 230 VAC
- EPD and printer port for connecting to a PC or printer
- Programmable print output strings
- Available in 150 lb/60 kg, 300 lb/150 kg, 500 lb/300 kg capacities
- Selectable unit of measure lb/kg/g/oz
- Load cell quick disconnect
- Carbon steel platform, stainless steel platter
- 120 wall mount bracket included


Bench Scales with Indicators

Specifications

- LINE VOLTAGES:**
115 or 230 VAC
- FREQUENCY:**
50 or 60 Hz
- EDP PORT:**
Full duplex RS-232
- PRINTER PORT:**
Output-only RS-232 or active 20 mA current loop
- BOTH PORTS:**
9600, 4800, 2400, 1200, 600, 300 bps;
7 or 8 data bits; even, odd or no parity
- PRINT OUTPUT STRINGS:**
300 character user programmable gross string
300 character user programmable net string
- DISPLAY:**
0.8" (20.3 mm), 6-digit Super Red Light Emitting Diode (LED) display, 7-segment, number digits
- ANNUNCIATORS:**
8 LEDs, 4 unit descriptors
- ADDITIONAL SYMBOLS:**
Designators for: center of zero, stand still, gross, net center of zero, standstill, lb, kg, oz, g

- KEYBOARD:**
5-key flat membrane panel
- OPERATING TEMPERATURE:**
-10°C to 40°C/14°F to 104°F (legal)
-10°C to 50°C/14°F to 122°F (industrial)
- RATING/MATERIAL:**
Enclosure: heavy gauge ABS
- SCALE APPROVALS:**
NTEP-certified per H-44, Class III, 5000d, Measurement Canada approved, AM-5393

- INDICATOR APPROVALS:**
NTEP certified per H-44 at 10,000 Divisions, Class III/IIIL, CC# 03-059; Measurement Canada approved, Class III/IIILD at 10,000 Divisions; TC6008; UL & CUL listed; CE marked
- WARRANTY:**
1-year limited warranty

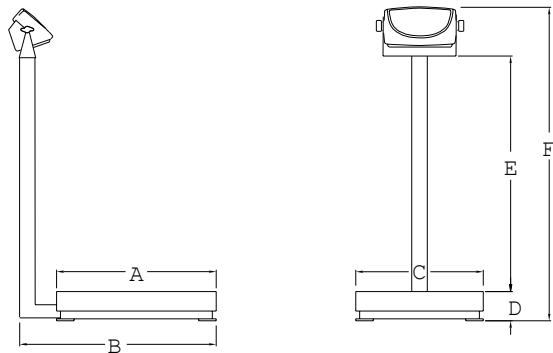

DIGI BENCH SCALE AND INDICATOR PACKAGE

PART #	CAPACITY	EST. SHIP WEIGHT	A	B	C	D	E	F
83303	150 lb/60 kg x 0.05 lb/0.02 kg	57 lb	20.44"	24.6"	16.31"	3.94"	23.9"	32.6"
			(519.17 mm)	(624.84 mm)	(414.27 mm)	(100.07 mm)	(607.06 mm)	(828.04 mm)
83304	300 lb/150 kg x 0.1 lb/0.05 kg	57 lb	20.44"	24.6"	16.31"	3.94"	23.9"	32.6"
			(519.17 mm)	(624.84 mm)	(414.27 mm)	(100.07 mm)	(607.06 mm)	(828.04 mm)
83305*	500 lb/300 kg x 0.1 lb/0.1 kg	57 lb	20.44"	24.6"	16.31"	3.94"	23.9"	32.6"
			(519.17 mm)	(624.84 mm)	(414.27 mm)	(100.07 mm)	(607.06 mm)	(828.04 mm)

* Measurement Canada Approved

Options/Accessories
73381 4" (100 mm) castors (four swivels, two with brakes)

