



Hostile Environment Load Cell Cable EL146HE & EL147HE

Standard Features

EL146HE: 4-Wire Load Cell Cable

EL147HE: 6-Wire Load Cell Cable

- Designed for use in hostile environments
- Polyurethane jacketing provides superior chemical and abrasion resistance
- RFI and EMI protected with foil overbraid shield
- Unmatched durability, yet extremely flexible
- All conductors are industry-standard color coded
- Diameter—EL146HE: 0.28" (7.1 mm); EL147HE: 0.32" (8.1 mm)
- The 6-wire cable is best suited for longer runs where remote sense lines can be used
- Use the 4-wire cable for repairing or extending existing cable
- Temperature rating -30°C to 80°C (-22°F to 176°F)

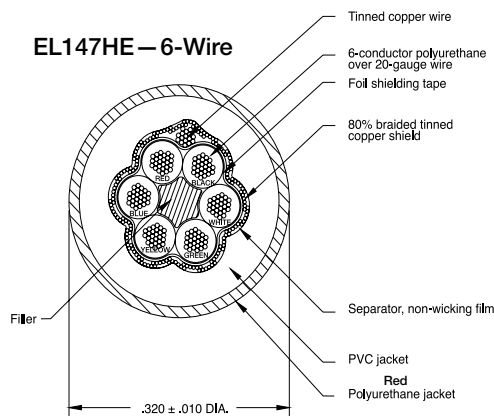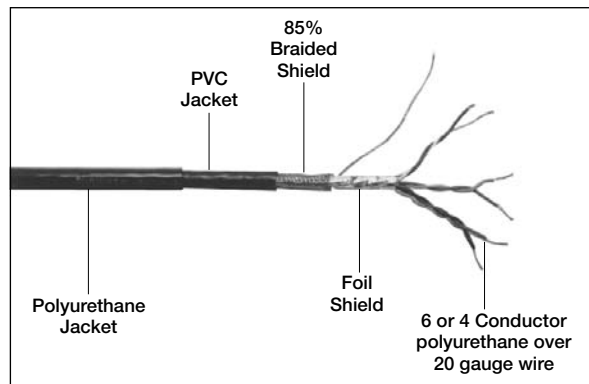

PART #	DESCRIPTION - CONTINUOUS FEET (M)/ROLL	PRICE
15510	100 ft... (30.5).....4-Conductor Hostile Environment Cable.....	\$145.00
15511	250 ft... (76.2).....4-Conductor Hostile Environment Cable.....	355.00
15512	500 ft... (152.4).....4-Conductor Hostile Environment Cable.....	685.00
15513	1,000 ft (304.8).....4-Conductor Hostile Environment Cable.....	1,295.00
15494	Custom Length4-Conductor Hostile Environment Cable.....	1.50/ft
15520	100 ft... (30.5)6-Conductor Hostile Environment Cable.....	210.00
15521	250 ft... (76.2)6-Conductor Hostile Environment Cable.....	495.00
15522	500 ft... (152.4)6-Conductor Hostile Environment Cable.....	950.00
15523	1,000 ft (304.8)6-Conductor Hostile Environment Cable.....	1,795.00
15496	Custom Length6-Conductor Hostile Environment Cable.....	2.30/ft



Standard Load Cell Cable EL146 & EL147

Standard Features

EL146: 4-Wire Load Cell Cable

EL147: 6-Wire Load Cell Cable

- 20 AWG tinned copper wire stranded for flexibility
- Braided shielding is encased in red PVC
- All conductors are industry-standard color coded
- Diameter—EL146: 0.25" (6.4 mm); EL147: 0.29" (7.4 mm)
- The 6-wire cable is best suited for longer runs where remote sense lines can be used
- Use the 4-wire cable for repairing or extending existing cable
- Temperature rating -30°C to 80°C (-22°F to 176°F)

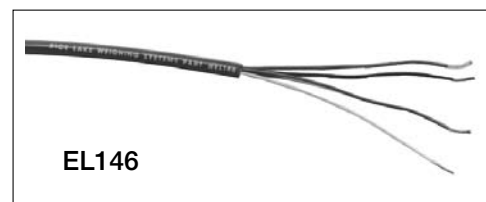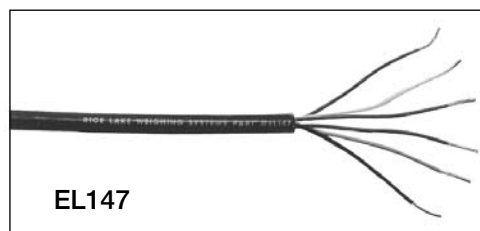

PART #	DESCRIPTION - CONTINUOUS FEET (M)/ROLL	PRICE
15505	100..... (30.5).....4-Conductor Cable.....	\$115.00
15506	250..... (76.2).....4-Conductor Cable.....	235.00
15507	500..... (152.4).....4-Conductor Cable.....	435.00
15508	1000... (304.8).....4-Conductor Cable.....	795.00
15493	Custom Length4-Conductor Cable.....	1.20/ft
15515	100 (30.5).....6-Conductor Cable.....	165.00
15516	250..... (76.2).....6-Conductor Cable.....	410.00
15517	500..... (152.4).....6-Conductor Cable.....	755.00
15518	1000... (304.8).....6-Conductor Cable.....	1,495.00
15495	Custom Length6-Conductor Cable.....	1.85/ft